



Accessible Floor Mounted Drinking Fountain

Model RBA8909-429



Materials & Features

Accessible Compliant to AS1428.2-1992. Manufactured from stainless steel with all exposed surfaces in satin finish. Stainless steel, shielded bubbler with self-closing, luminance contrast, push button and non-squirt features. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Unit is not refrigerated and is suitable for outdoor use.

Technical Detail

Inlet Connection:	G½B
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Water Temperature:	4 - 30°C
Basin and Housing:	1.6mm, type 304 Stainless Steel
Force to Activate:	< 20N


Installation

Supply water and waste connections through floor, connections can be made inside unit through access panels. Mount unit to floor using floor anchors (supplied by others).

Related Products

- RBA8900-429** Accessible Compliant Wall Mounted Drinking Fountain
- RBA2750-031** Remote Chiller
- RBA8889-186** Accessible Compliant Basin & Tap

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

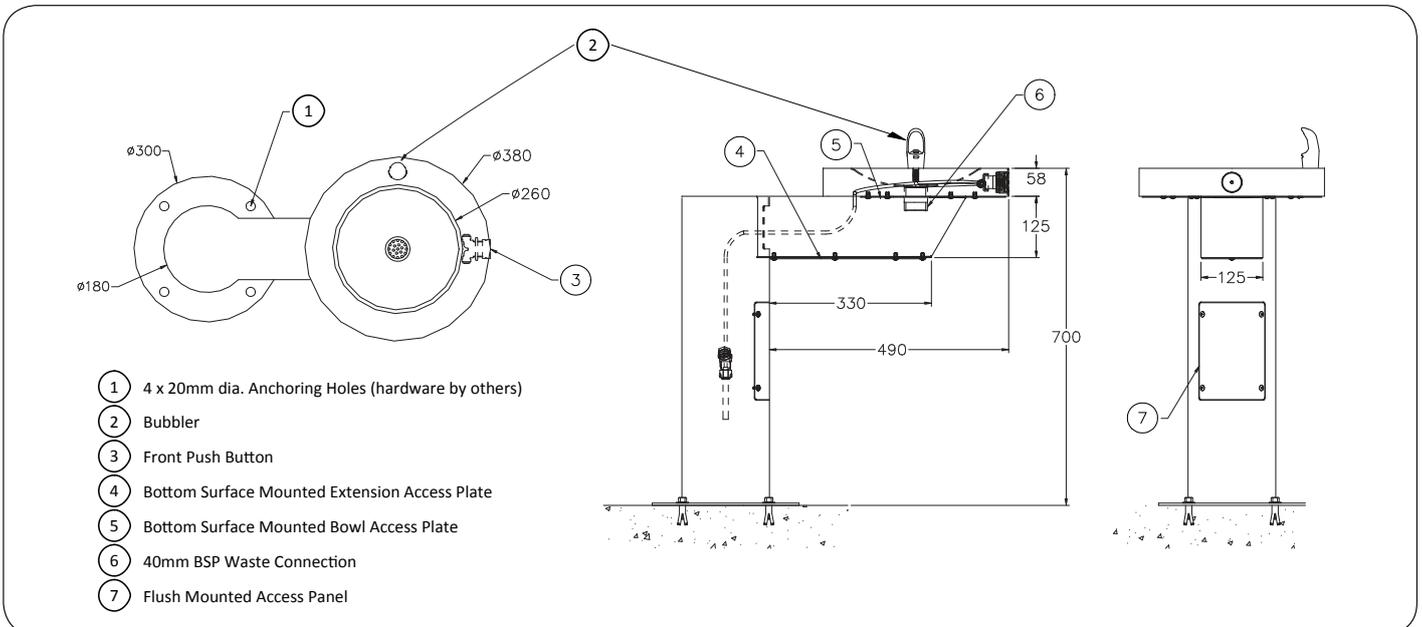

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 01/16 © 2016 by RBA Group TD/Model RBA8909-429/0116