

# RBA4L50 Basin Mixer



## APPLICATION

Suitable for use with basins or benchtops up to 50mm thickness. Supplied with 350mm exible 15mm BSP tails for easy installation.

## TAP HOLE

Tap hole diameter between 32-35mm.  
Horseshoe washer and pin bolt for easy installation.

## FEATURES

- Softclose™ ceramic cartridge prevents water hammer.
- Water supply pressure 50-1000kPa.
- Recommended operating pressure 100-500kPa.
- Adjustable flow control.
- Adjustable hot water limitation.
- Low noise filters.
- 10 year warranty on cartridge.
- Made in Sweden.

## OPTIONS

Refer to Optional Items and Accessories for Details.

## COLOURS

Chrome


## APPROVALS AS3718

Manufactured in DR brass  
AS/NZS 6400 (WELS)

## MODELS

RBA4L50-7070

RBA4L50 Basin Mixer

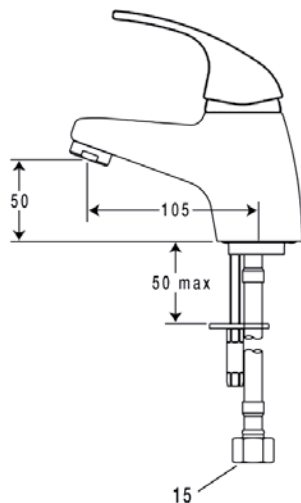

# FM Mattsson

— Different on the inside

Technical Specifications

**SYDNEY • MELBOURNE • BRISBANE • PERTH • AUCKLAND**  
Australia 1300 788 778 • sales@rba.com.au • www.rba.com.au  
New Zealand 0800 722 111 • sales@rbagroup.co.nz • www.rbagroup.co.nz



RBA TD/RBA4L50-7070/0613